


ZTE


Dongle Installation for Mac



- Plug the dongle; The **Install Mobile Partner** wizard will start automatically
- Click **Continue**

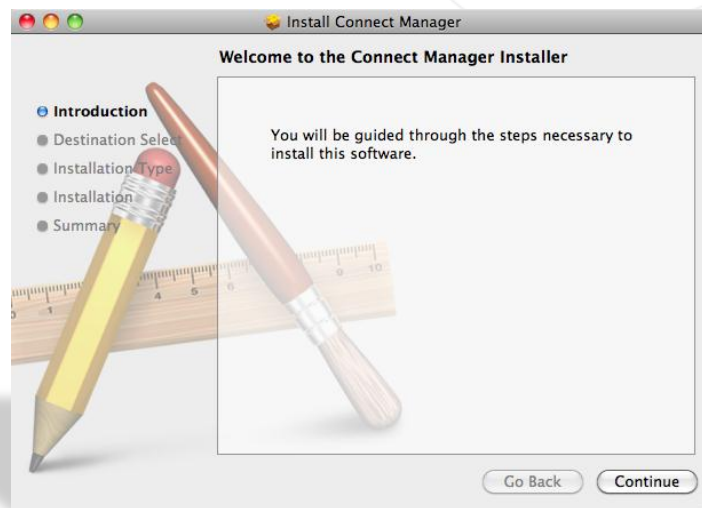


- **Destination Select** tab
- Click **Continue**

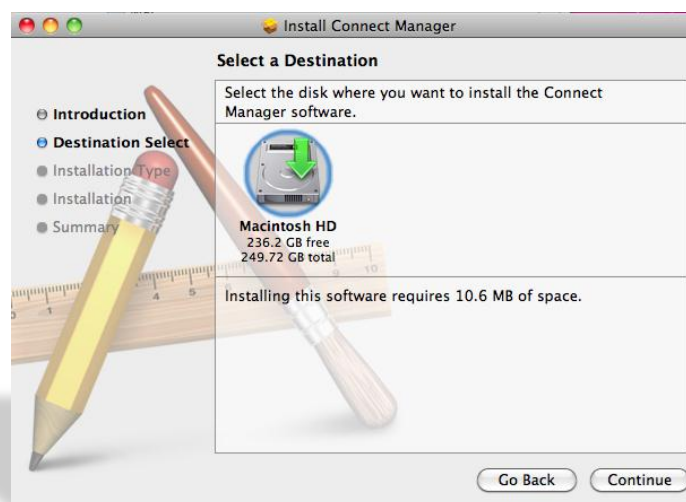


Installation Type tab

■ Click **Install**

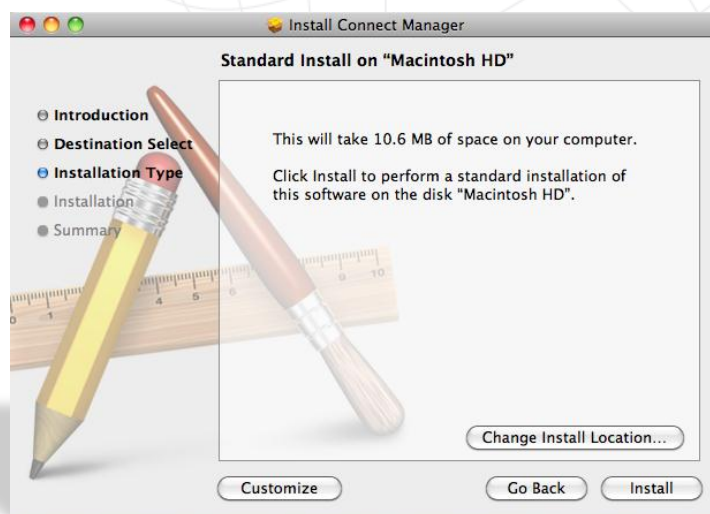

Summary tab


■ Click **Close**

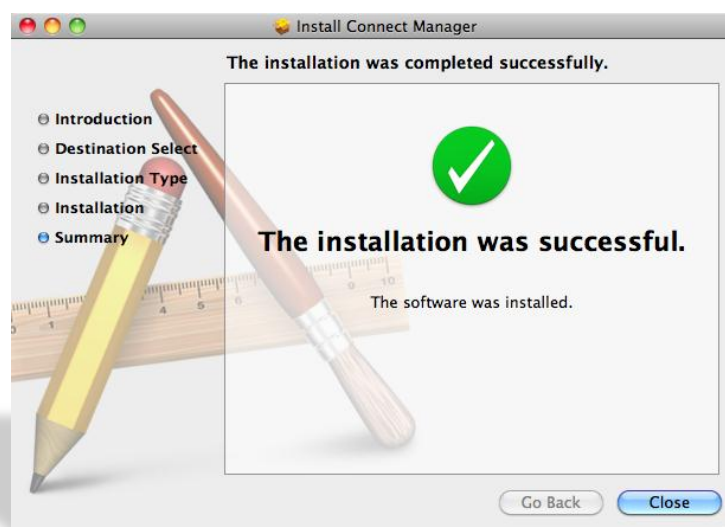




Connect Manager window

- Enter the **PIN**
- Click **OK**

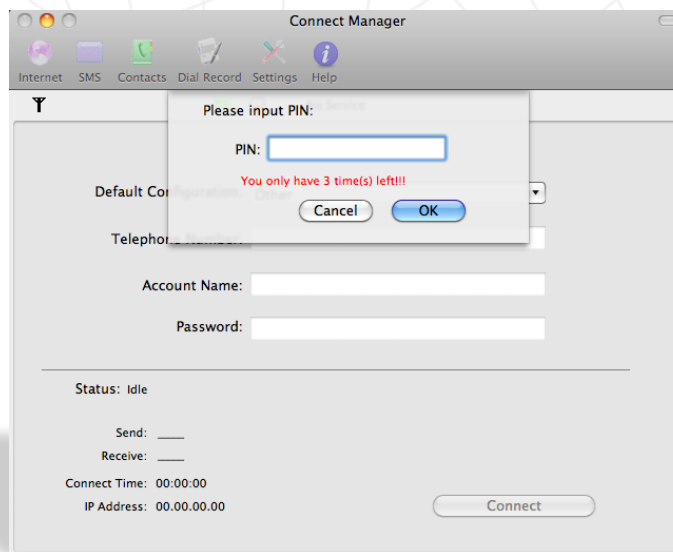

Connect Manager window


- Select **Edit Configuration** from the **Default Configuration** list

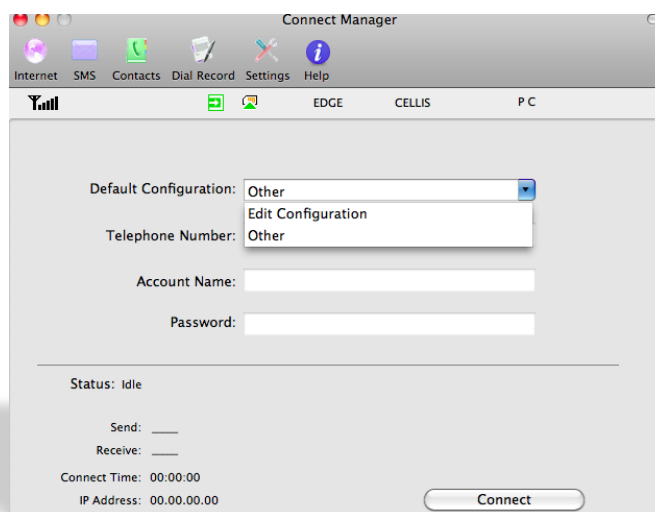




Connect Manager window

- Click on the “+” button

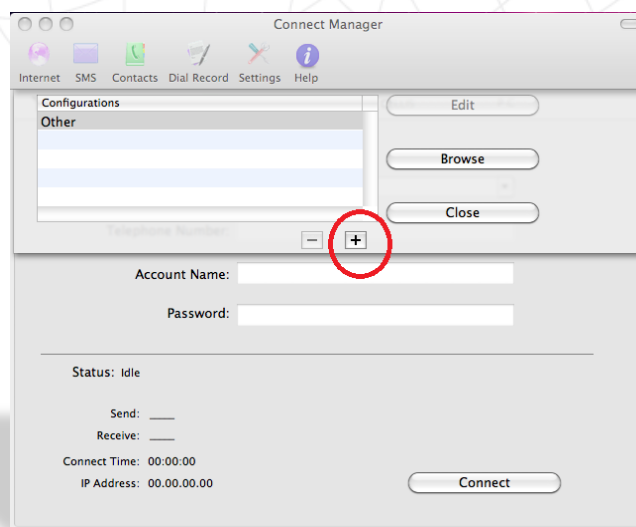

Connect Manager window

- Click on the **Edit** button

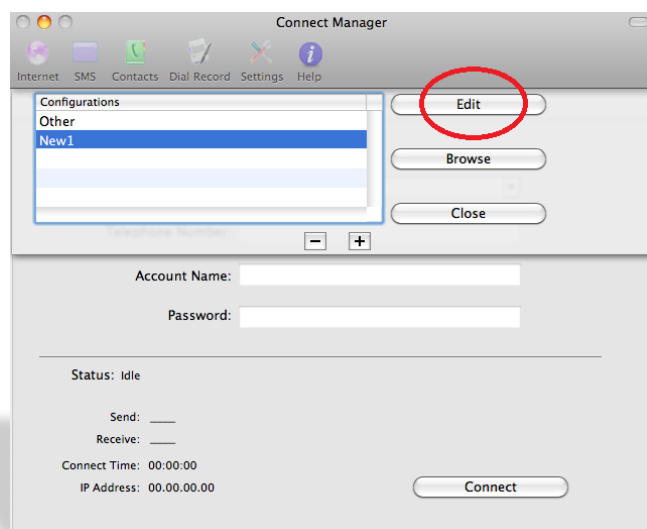



Fill the fields in the **Connect Manager** window

- Description: **3G**
- Telephone Number: ***99#**
- Click **Save Username and Password**
- Click **Use the following APN name**
Enter: **usb.mic1.com.lb**
- Click **Obtain DNS server address automatically**
- Click **Obtain PDP address automatically**
- Click **Obtain PDP address automatically**
Click: **PAP**
- Click **OK**



Connect Manager window

- Select **3G** from the **Default Configuration** list
- Click **Connect**

A screenshot of the Connect Manager application window. The window has a title bar with standard OS controls and a menu bar with options: Internet, SMS, Contacts, Dial Record, Settings, and Help. Below the menu bar is a toolbar with icons for Internet, SMS, and a signal strength indicator. The main area shows a 'Default Configuration' dropdown menu set to '3G'. Below this are input fields for 'Telephone Number' (containing '*99#'), 'Account Name' (containing 'mic1'), and 'Password' (containing four dots). The 'Status' is 'Idle'. At the bottom, there are fields for 'Send' and 'Receive' (both empty), 'Connect Time' (00:00:00), and 'IP Address' (00.00.00.00). A 'Connect' button is located at the bottom right.

Connect Manager window

- Status will change to **Connected**

A screenshot of the Connect Manager application window after a successful connection. The 'Status' is now 'Connected', which is circled in blue. The 'Send' field shows '6.89 KB' and the 'Receive' field shows '6.62 KB'. The 'Connect Time' is now '00:01:00' and the 'IP Address' is '172.23.73.95'. The 'Disconnect' button is now visible at the bottom right.